



Village of Round Lake Building Department

442 N. Cedar Lake Road, Round Lake, IL 60073
Ph. 847-546-0963 Fax 847-546-1872
www.eroundlake.com

REPLACEMENT WINDOW GUIDE

The replacement of frames, sashes and glazing (glass) is considered a window replacement. Window replacement is reviewed and inspected to assure safe emergency egress is maintained and the provisions of the current energy codes are complied with.

Approved building permits become invalid unless work commences within 180 days of the issue date or when no inspections haven conducted within 180 days.


No change to the approved plans is authorized without prior written approval by the code official and only the construction indicated on the attached plans is authorized by the issuance of this permit.

IN ORDER FOR THE BUILDING DEPARTMENT TO PROCESS YOUR APPLICATION, THE FOLLOWING DOCUMENTS MUST BE SUBMITTED :

- Completed building permit application.
- Homeowner's Association approval letter if applicable.
- The opening size of the existing window and the opening size of the replacement window. Windows for basement egress and bedrooms with minimums illustrated in figure 1.
- The U factor value of the window. Manufacture will provide information as illustrated in figure 2. Currently acceptable U-factor is .32 or less for residential, .38 for commercial.
- A readable drawing indicating the location within the building and other pertinent information such as stairs, tubs, and doors. Also detail drawing of headers and stud support for new or enlarged windows.

Required Inspections:

1. Plan review and rough framing when window size is increased.
2. Final inspection – **DO NOT REMOVE** factory labels until approved by the Village inspector.

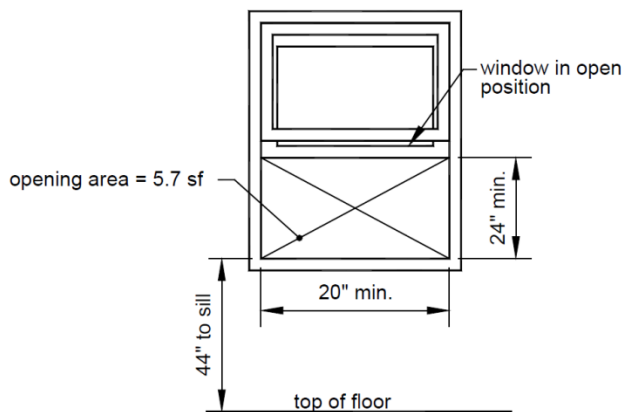

 National Fenestration Rating Council CERTIFIED	World's Best Window Co. Millennium 2000+ Vinyl-Clad Wood Frame Double Glazing - Argon Fill - Low E Product Type: Vertical Slider
ENERGY PERFORMANCE RATINGS	
U-Factor (U.S./I-P) 0.30	Solar Heat Gain Coefficient 0.30
ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance 0.51	Air Leakage (U.S./I-P) 0.2
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product line. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information. www.nfrc.org</small>	